


# Manual Total Station Zoom30 Pro Series



## Colour- & Touchscreen

- Large 3.5" Q-VGA Display
- Fast Navigation
- Brilliant Readability

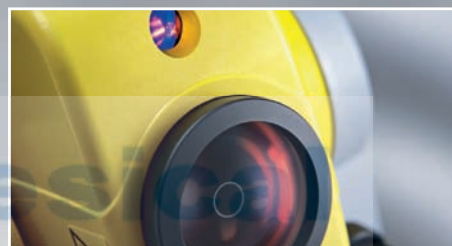

## Highest Functionality

- NavLight™ Alignment Aid
- 600m Non-Prism Range
- 3 mm + 2 ppm Reflectorless



## Easy Connectivity

- USB Memory Stick
- Bluetooth® Transfer
- Plug 'n Play Technology

# Zoom30 Pro Series

The Zoom30 Pro brings all the functionality you expect from a total station right at your fingertips. A total station for all those, demanding highest performance and comfort that "works when you do".



The Zoom30 Pro combines faster stake-out with NavLight™, outstanding non-prism distance measurement over 600 m, easy data transfer via USB Stick, extra large 3.5" colour touch screen, troublefree quadruple axis compensation and built in Bluetooth® communication in the most efficient and convenient manual total station. A complete suite of applications including road design, area & volume calculations and dedicated graphical construction layout enable you to complete your daily tasks, efficient and reliable.

<b>Zoom30 Pro accXess4</b>	Distance measurement on reflector and 400m reflectorless*
<b>Zoom30 Pro accXess6</b>	Distance measurement on reflector and 600m reflectorless*

## Angle measurements

Accuracy	2" (0.6 mgon), 3" (0.9 mgon), 5" (1.5 mgon), 7" (2 mgon),
Display resolution	1" (0.1 mgon)
Method	Absolute, continuous, diametrical
Compensation	Quadruple axis

## Distance measurements

Prism	3,500 m / 2 mm + 2 ppm
Reflectorless	3 mm + 2 ppm > 500 m: 4 mm + 2 ppm
Footprint	8 x 20 mm**

## Physical specifications

Weight	5.1 kg (incl. battery & tribrach)
Operating temp.	-30°C to 50°C***
Protection class	IP54 dust- and waterproof
Humidity	95 %, non-condensing

## NavLight™\*\*\*\*

Working range	5 m to 150 m
Position accuracy	5 cm at 100 m

**Distance meter (Reflector Mode):** Laser class 1 in accordance with IEC 60825-1 resp. EN 60825-1; **Laser plummet:** Laser class 2 in accordance with IEC 60825-1 resp. EN 60825-1, **Distance meter (Reflectorless Mode accXess™):** Laser class 3R in accordance with IEC 60825-1 resp. EN 60825-1



Copyright GeoMax AG.  
Illustrations, descriptions and technical specifications are not binding and may change.  
IX.MMXIII / 808082en

## Interface

Keyboard	Full alphanumeric
Display	3.5" Quarter-VGA colour touch screen (320x240 pixel), 10 lines x 30 characters, illuminated
Data recording	Internal memory 10,000+ pts (incl. measurements, coordinates & codes)
Interface	USB, serial & external power
Removable memory	USB memory stick
Bluetooth®	Device Class 1

## Power supply

Internal battery	Removable Li-Ion 4.4 Ah / 7.4 V
Operating time	36 h (continuous angle), 9 hours (continuous distance measurement every 30s)

## Plummet

Type	Laser point, adjustable brightness
Accuracy	1.5 mm at 1.5 m instrument height

## Operating system

Windows®	Embedded CE
----------	-------------

\* Optimal conditions to Kodak Grey Card (90% reflectivity)

\*\* At 50 m distance

\*\*\* Optional tested polar version, standard -20°C to 50°C

\*\*\*\* Optional

All trademarks and trade names are those of their respective owners.

