



# Telescopic Levelling Rods and Marking Spray

## Telescopic Levelling Rods TN14/15

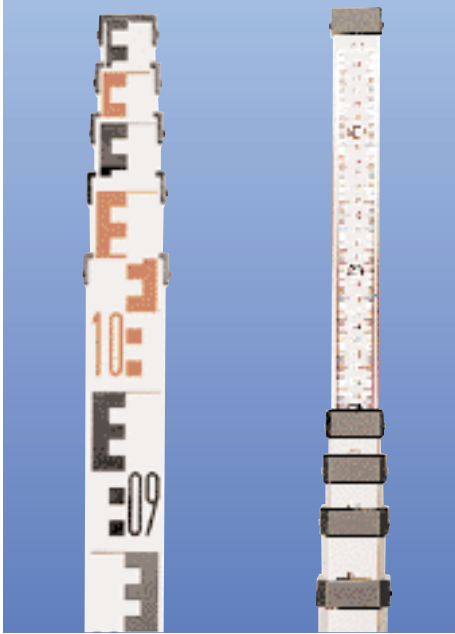


- Made of strong aluminium tubes
- Silver anodised finish
- Frontside cm-E graduation throughout total length
- Available in 4 m and 5 m
- Reverse side graduation to mm for height measurements
- Slit to fix LR7 Rod Level
- Optional: Nylon case with shoulder carrying strap, rod level LR 7

## Combi Rod TN 20-K

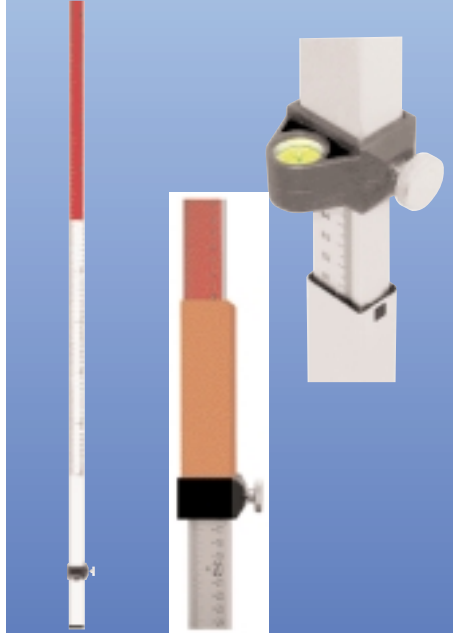

- Made of strong aluminium tubes
- Graduation in mm
- Length 2,40 m
- Lower part adjustable in height for zero setting
- Including circular bubble and carrying case
- Including adjustable clamp for receiver
- Weight 0,9 kg
- Ideal for use with rotating laser levels

## Telescopic Levelling Rod TN 15-0

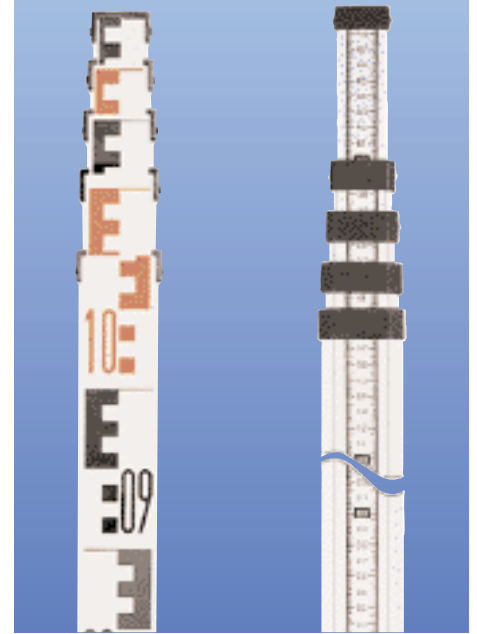

- Same as TN 15, however,
- Reverse side graduation to mm with "0" beginning at the bottom.
  - Available in 5 m only
  - Optional: Nylon case with shoulder carrying strap, rod level LR 7

## LR 7 Rod Level



- For TN 14/15 and TN 15-0
- Adjustable.

## Telescopic Rule EasyFix 5m



- Easy reading of measuring display.
- Auto-lock when completely pulled out. Two incorporated vials.
- Cm/mm-graduation on bottom tube.
- Retracted length 83 cm. Max. length 5 m
- Weight 2 kg.

Supplied with: Threaded pins for top and bottom plate for measuring to corners and edges, carrying case.